


NOTES :-
 PUMP TYPE --- HL150M.
 MAX. SOLIDS HANDLING --- 35mm.
 MOTOR KW --- 45.
 MOTOR FRAME --- 225M.
 MOTOR RPM --- 1450
 PROTECTION --- IP55 FOOT/FLANGE MOUNTED.

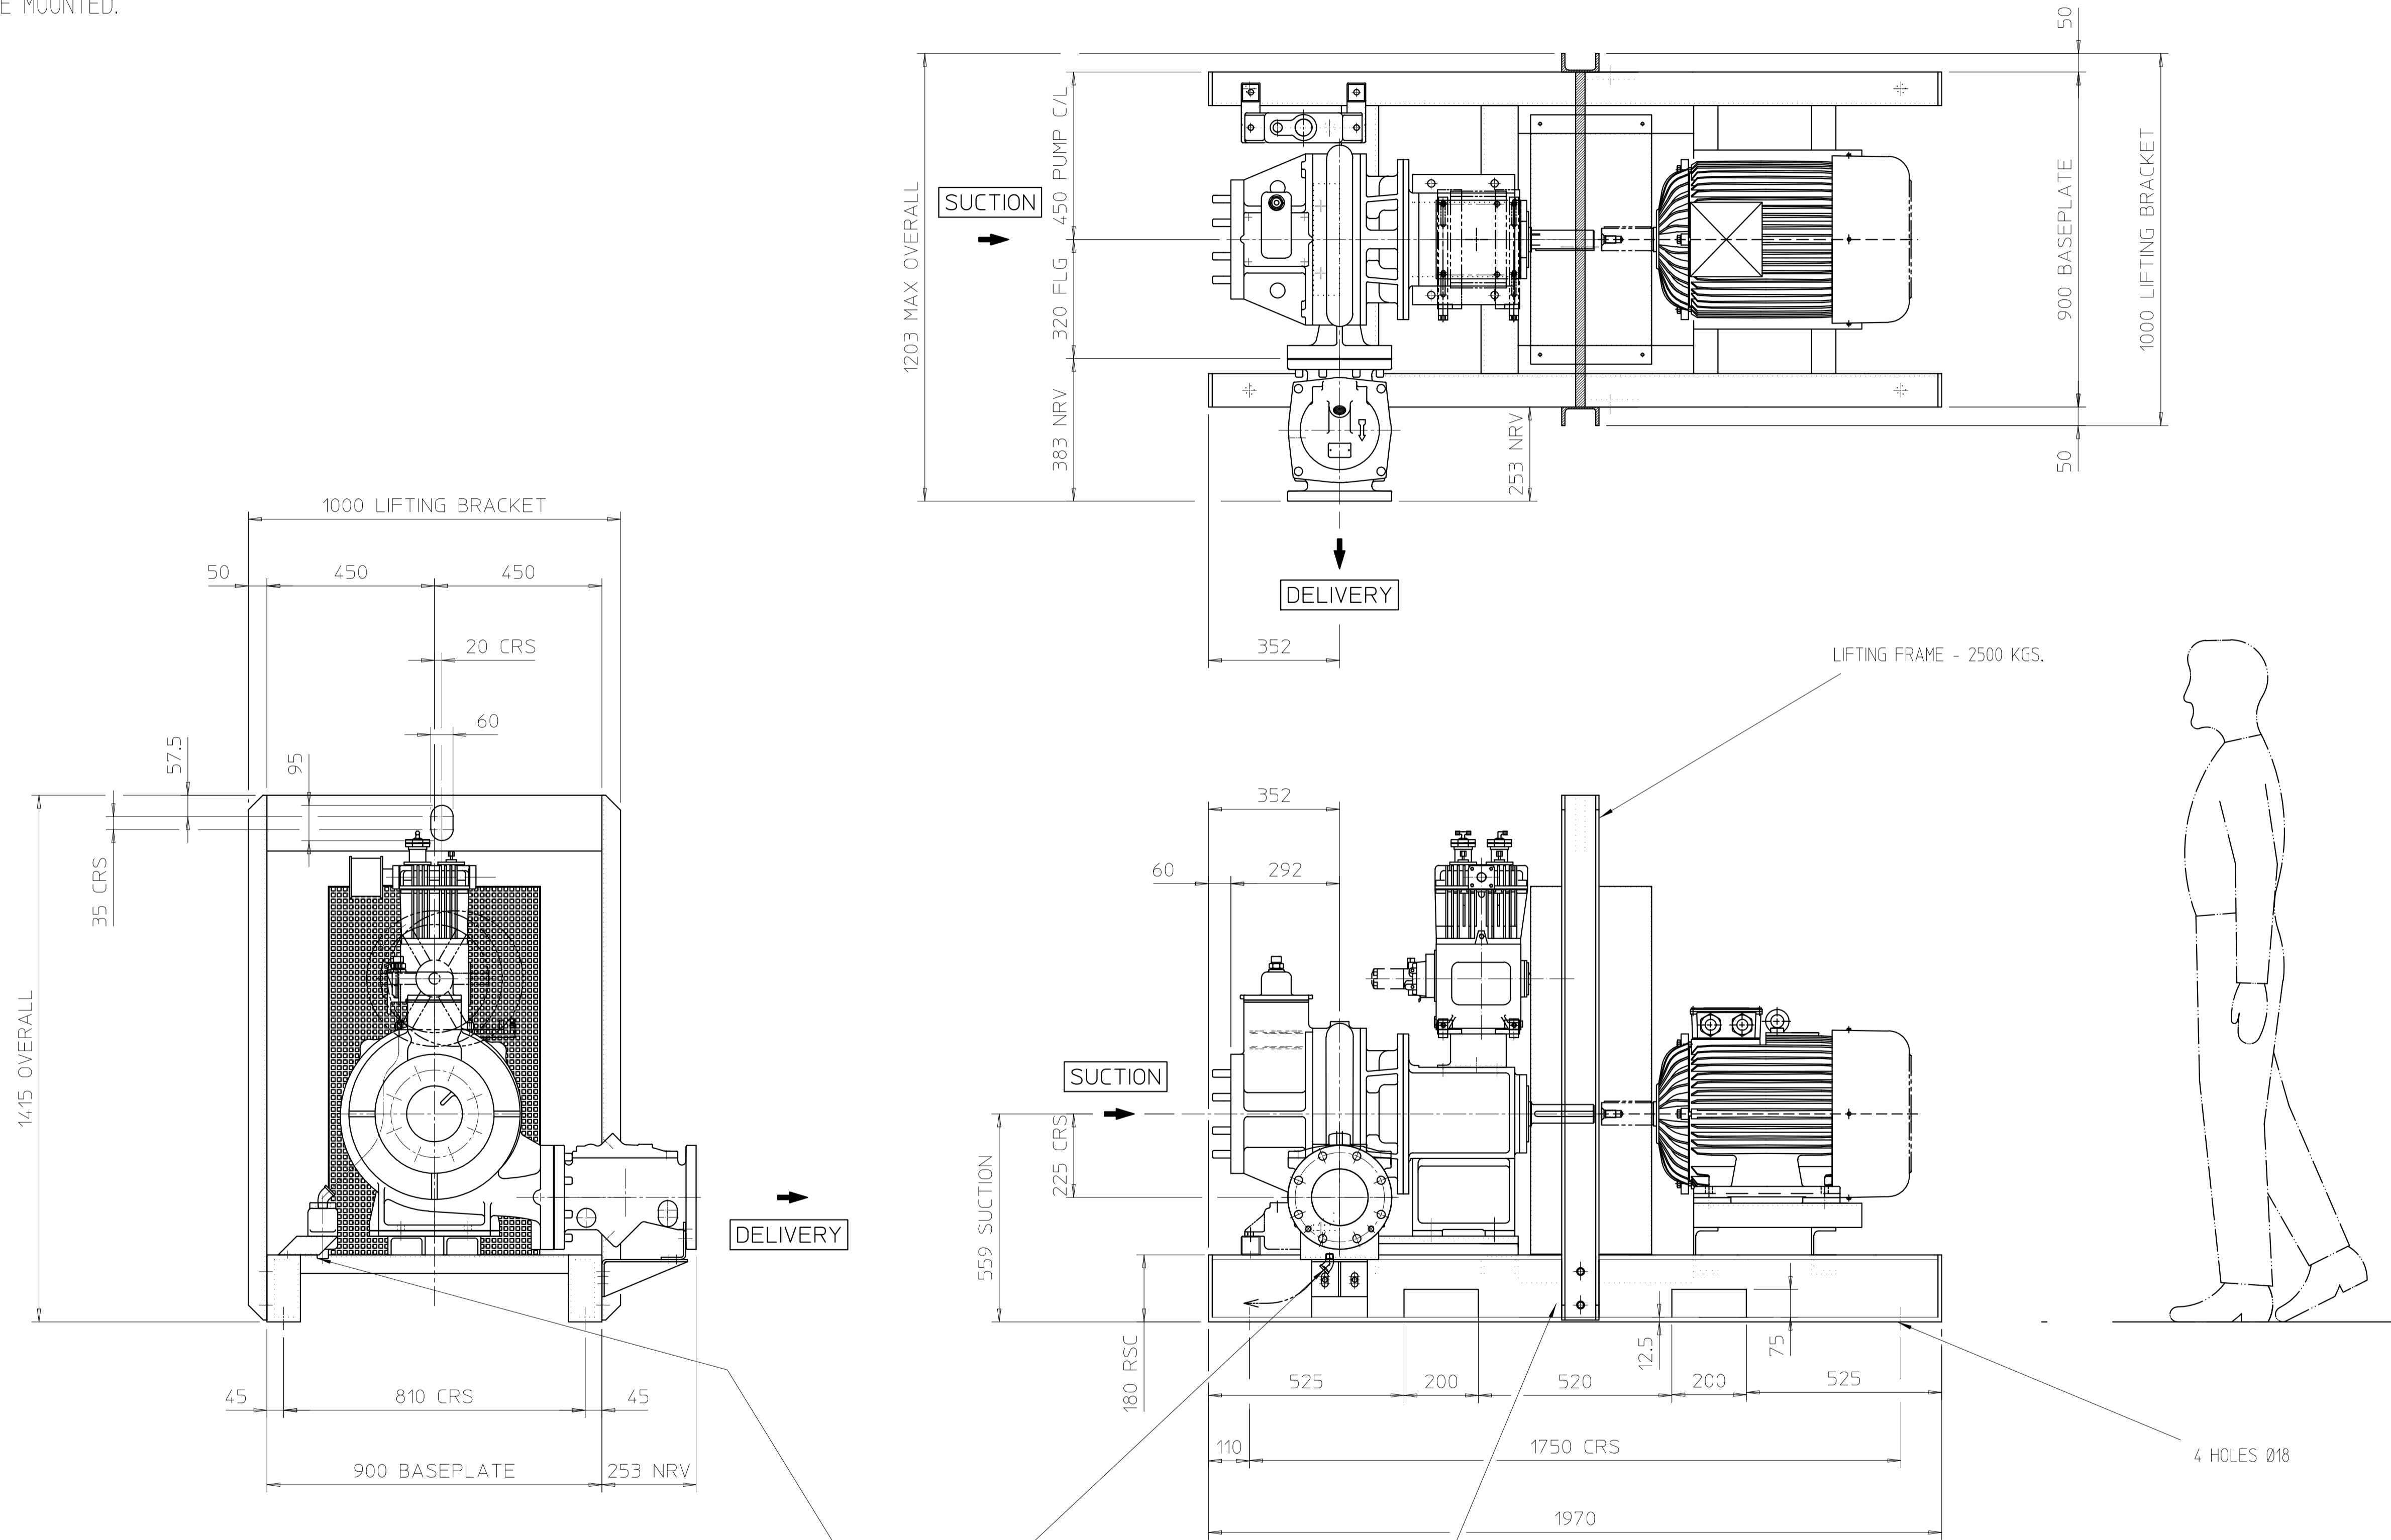

SUCTION FLANGED BS10 TABLE 'D'. / DELIVERY FLANGED BS4504 PN16.

FLANGE FIXING DETAIL :

	Size	P.C.D.	Hole Dia.	No. Holes
SUCTION	6"	235mm	5/8" UNC	8
DELIVERY	150mm	240mm	22	8

1/2" BSP DRAIN - CUSTOMER TO PIPE

FORK POCKETS

00341ECN: DRAWING COMPILED

godwin
 a xylem brand
 Xylem Water Services Ltd.
 Quenington
 Cirencester
 Gloucestershire
 GL7 5BX, UK
 Tel: +44 (0) 1285 790271
 Fax: +44 (0) 1285 790282
 www.godwinwater.com

TOLERANCES UNLESS OTHERWISE STATED
 FINISHING FABRICATION
 Above 500 + 0.25 Above 500 + 0.3
 50 to 500 + 0.4 50 to 500 + 0.5
 0 to 50 + 0.25 0 to 50 + 0.3
 1 mm above + 0.1 0 to 150 + 0.25
 Angular ± 0.05 Angular ± 0.1
 SURF. FINISHES
 Above 500 + 0.25 Above 500 + 0.3
 50 to 500 + 0.4 50 to 500 + 0.5

IF IN DOUBT - ASK DO NOT SCALE
 THIRD ANGLE PROJECTION
 TPS TO BS 8888:2013
 DIMENSIONS: mm
 SURFACE FINISH: microns

CREATED BY Benfield, Scott - Xylem
 CREATED ON Thu Jan 28 16
 CHECKED BY Benfield, Scott - Xylem
 CHECKED ON Thu Jan 28 16

DRG NO. HL150M-01-EBO-003.MI
 TITLE HL150M 45KW DRI-PRIME
 C/CONST. FLG 68LTD X 150MM PN16 45KW MOTOR.

Proprietary and Confidential

REV 1.0 A1