
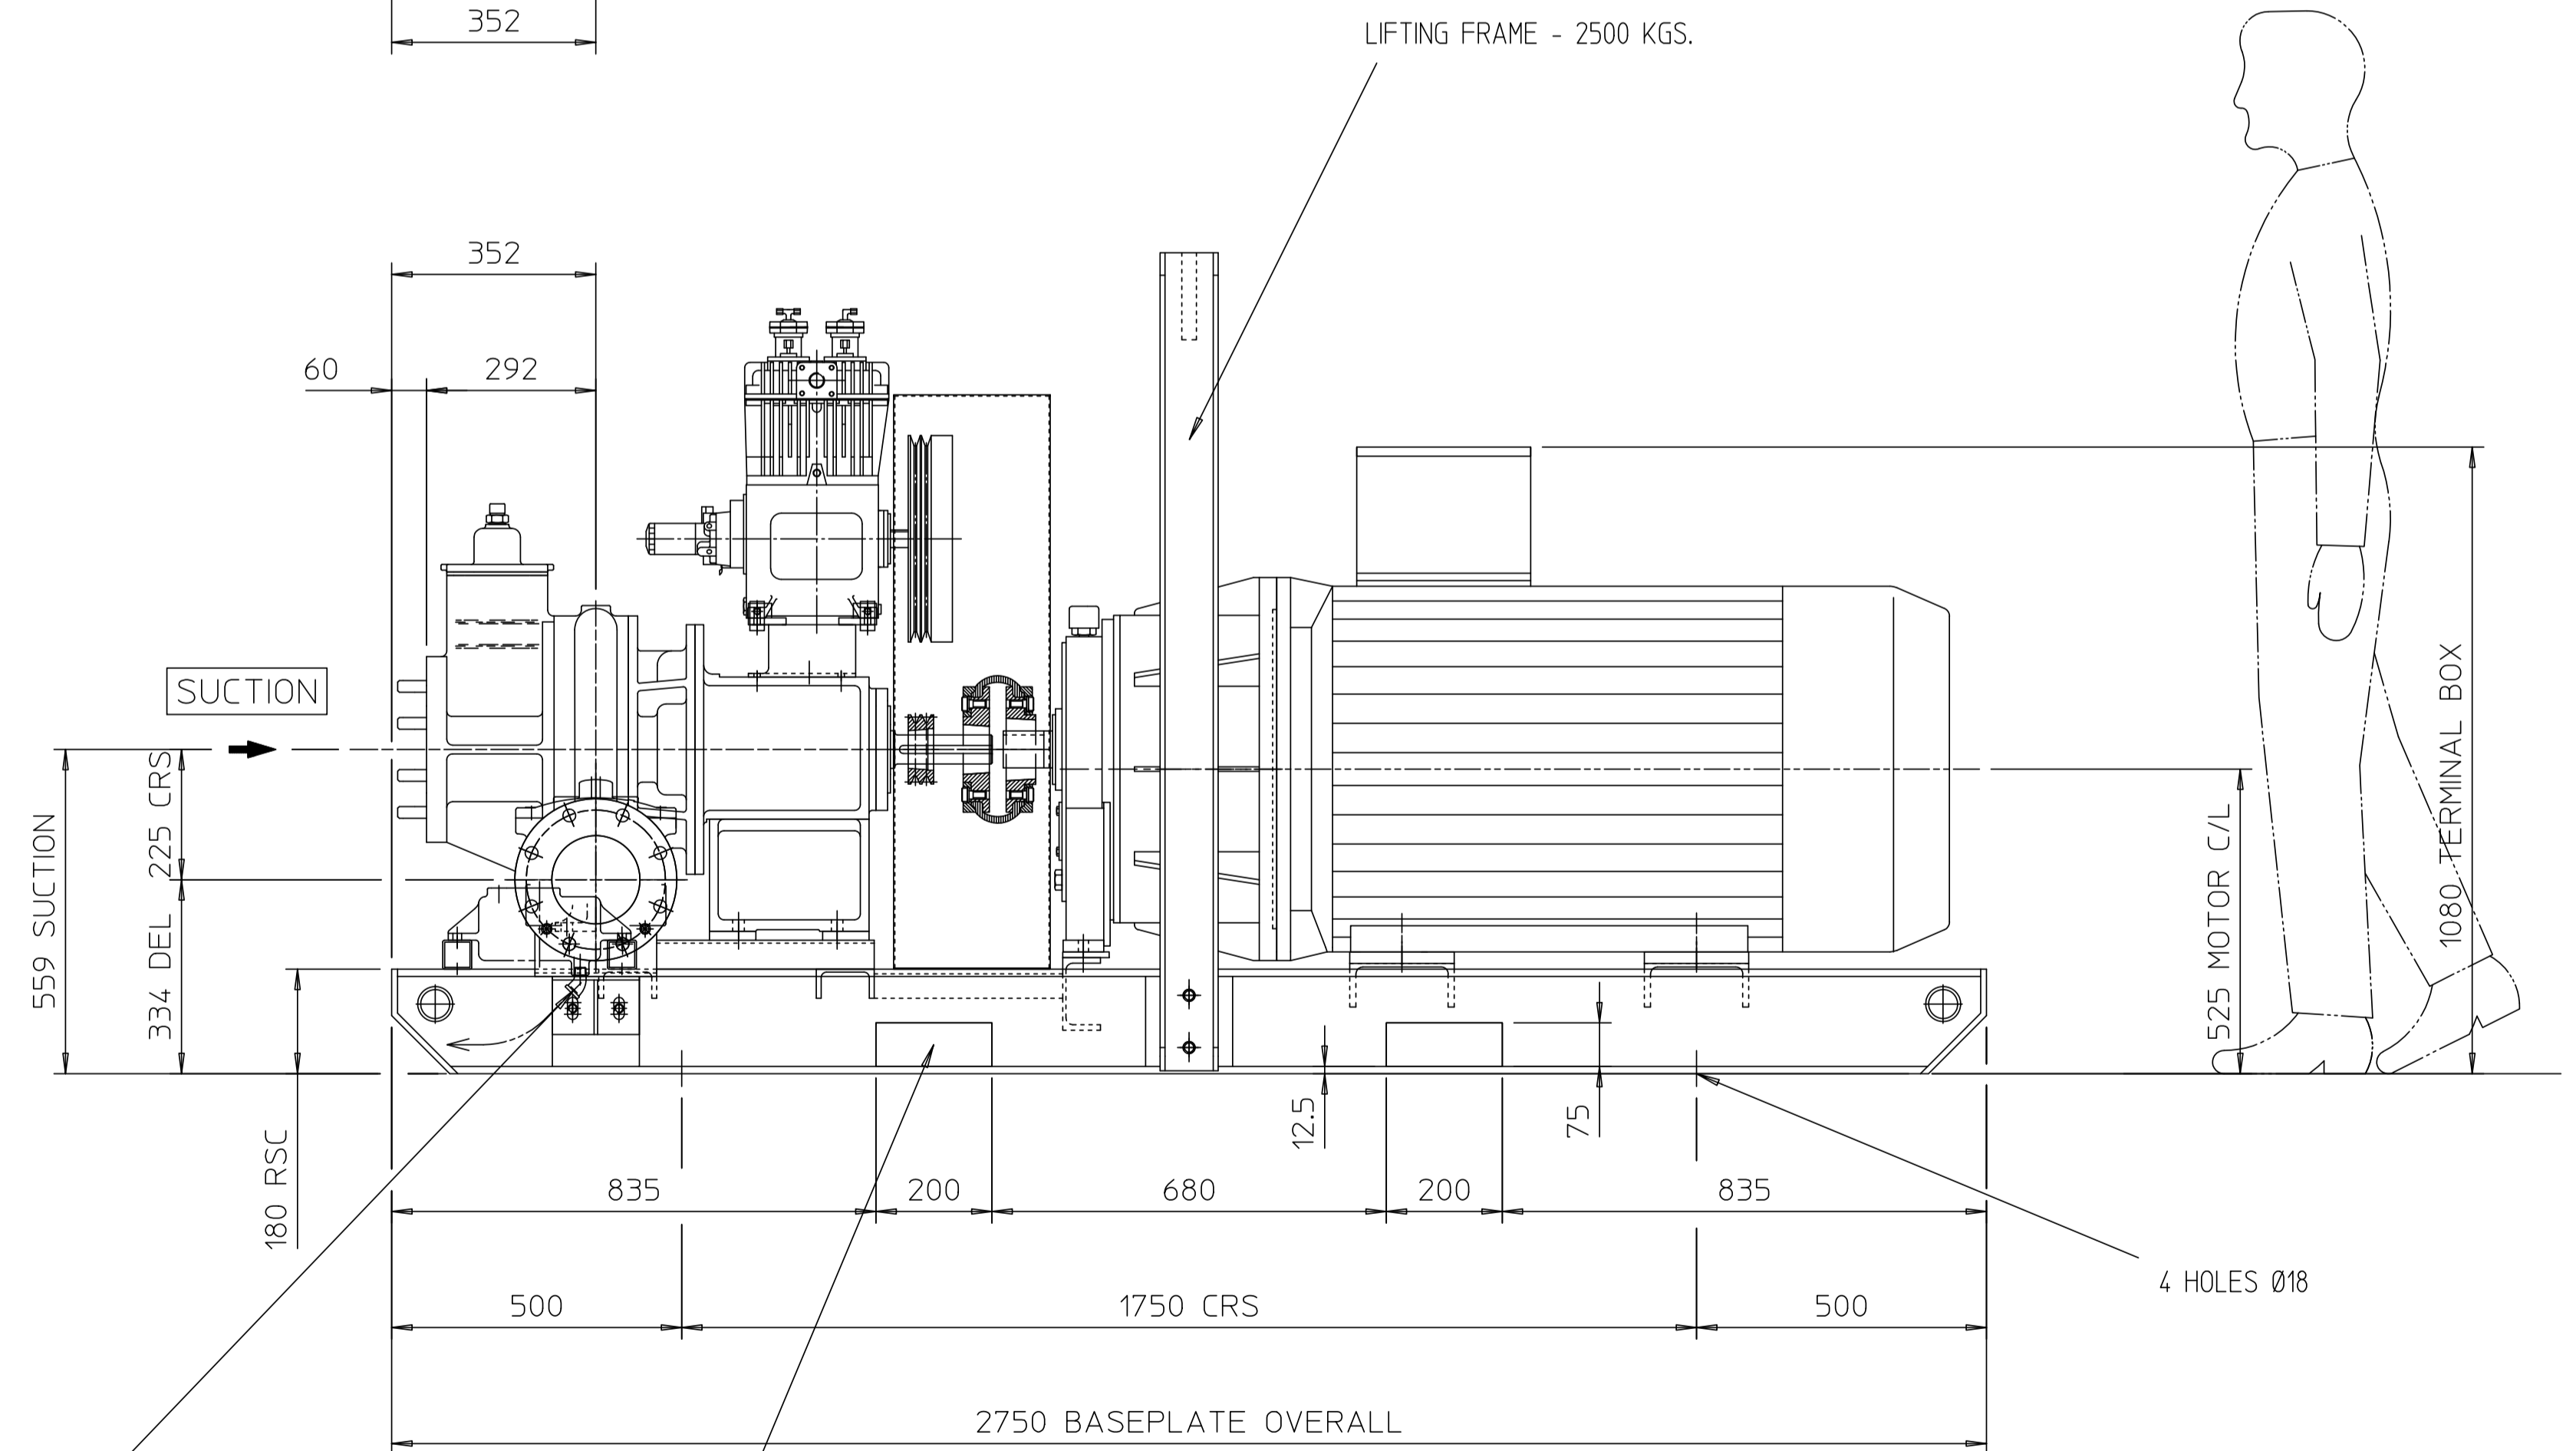
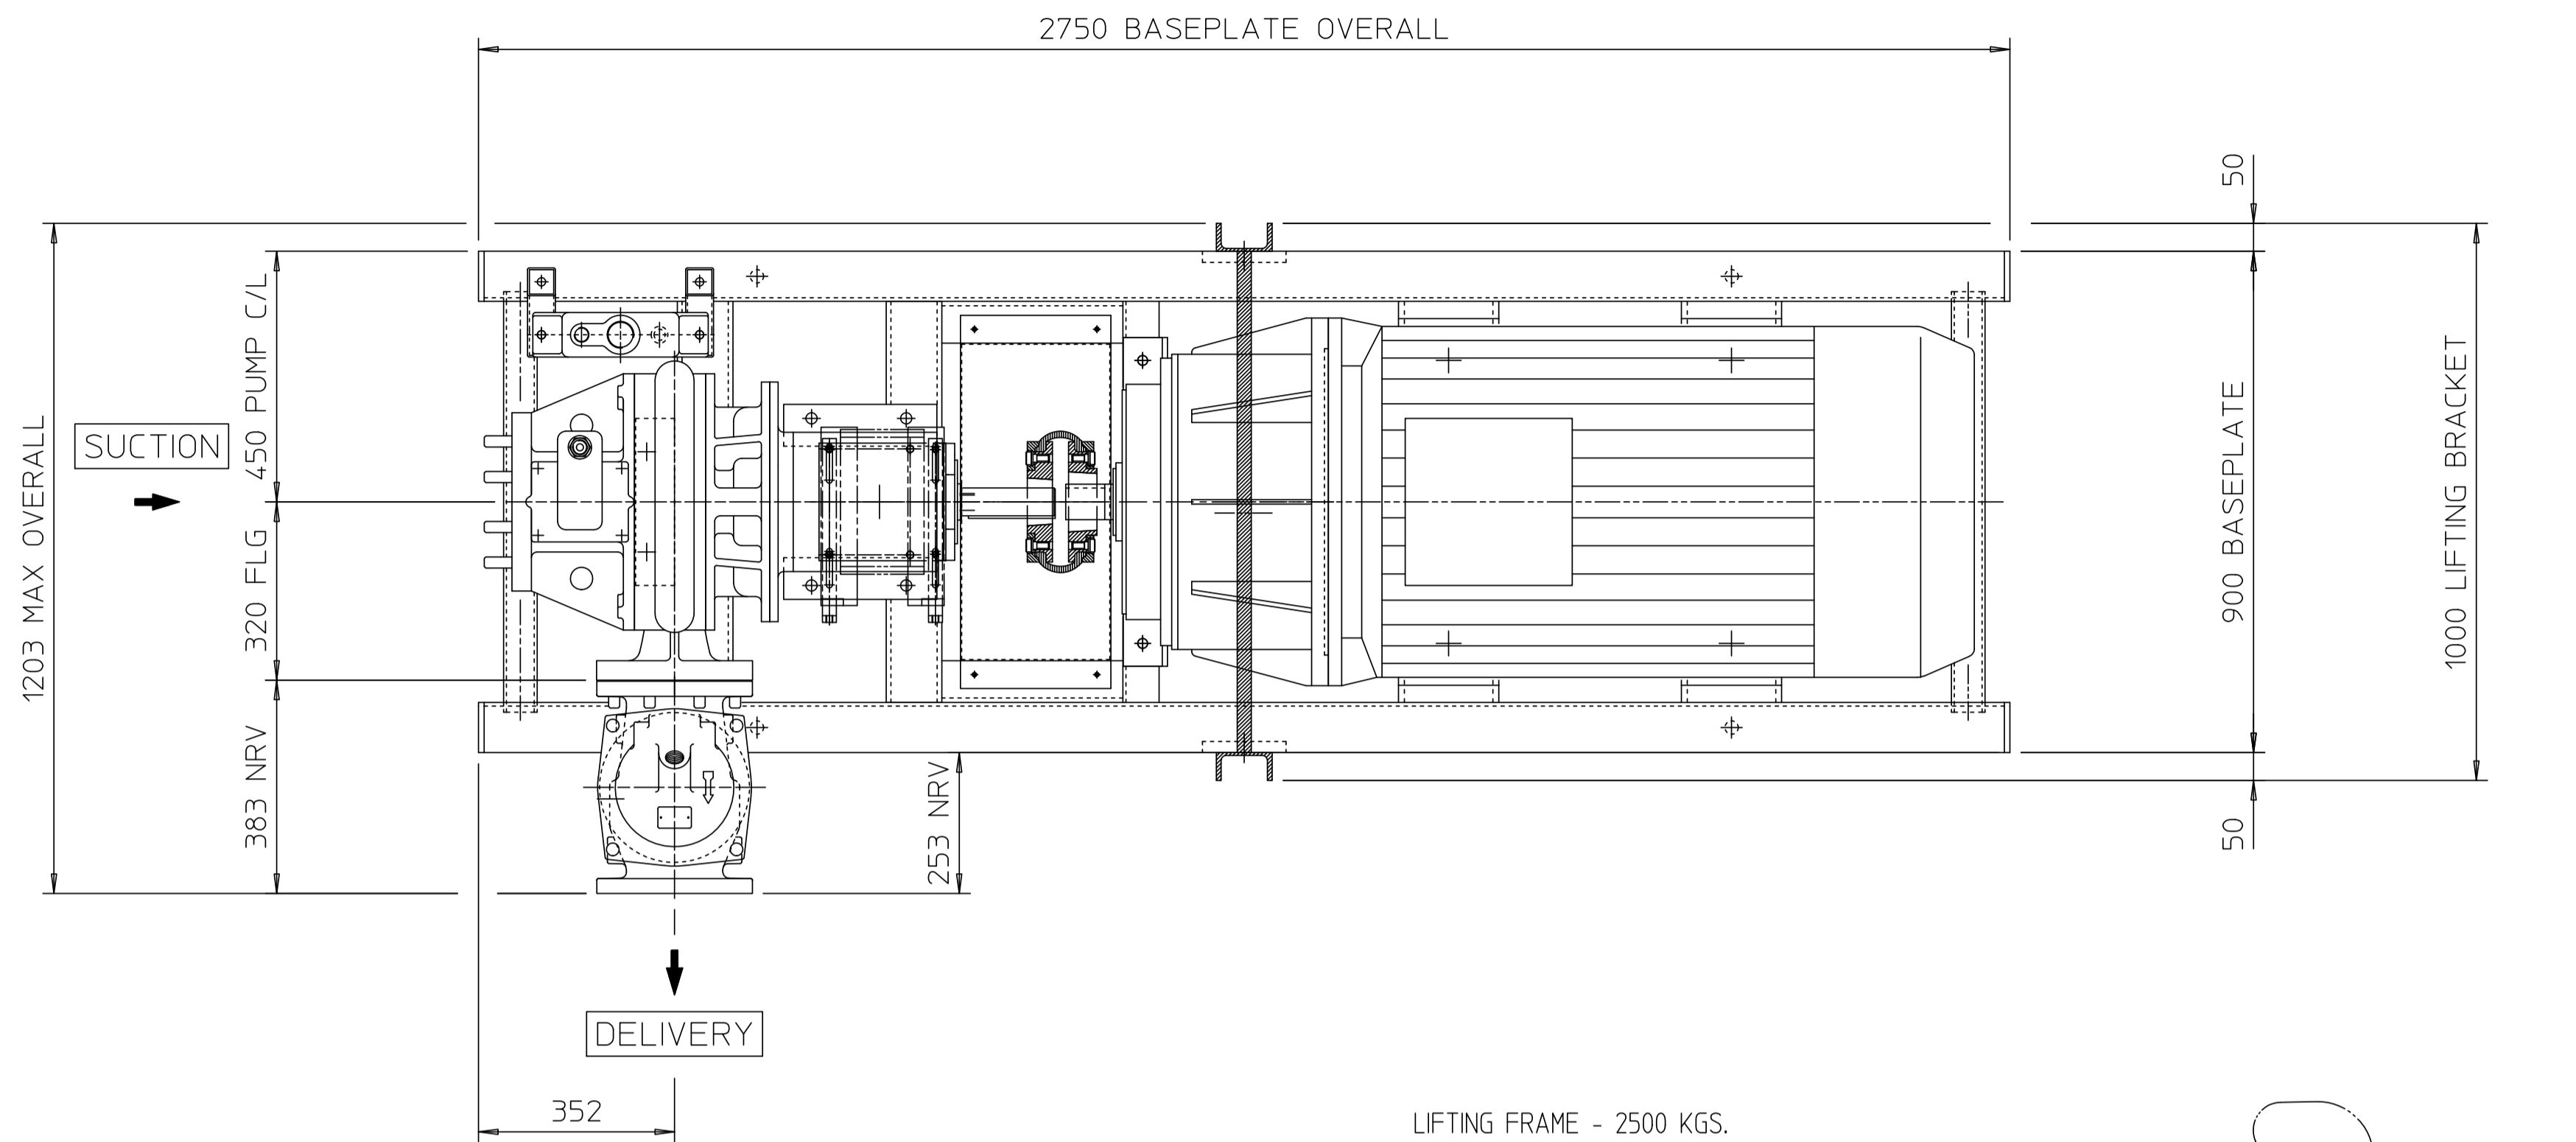


NOTES :-
 PUMP TYPE --- HL150M.
 MAX. SOLIDS HANDLING --- 35mm.
 MOTOR KW --- 160.
 MOTOR FRAME --- DM2-315L (DUTCHI).
 PROTECTION --- IP55 FOOT/FLANGE MOUNTED.
 MOTOR RPM --- 1450.
 GEARBOX OUTPUT RPM --- 2400 (RATIO 1.615 : 1).
 COMPRESSOR RPM --- 757.
 ACTUAL WEIGHT --- 2235 KGS.

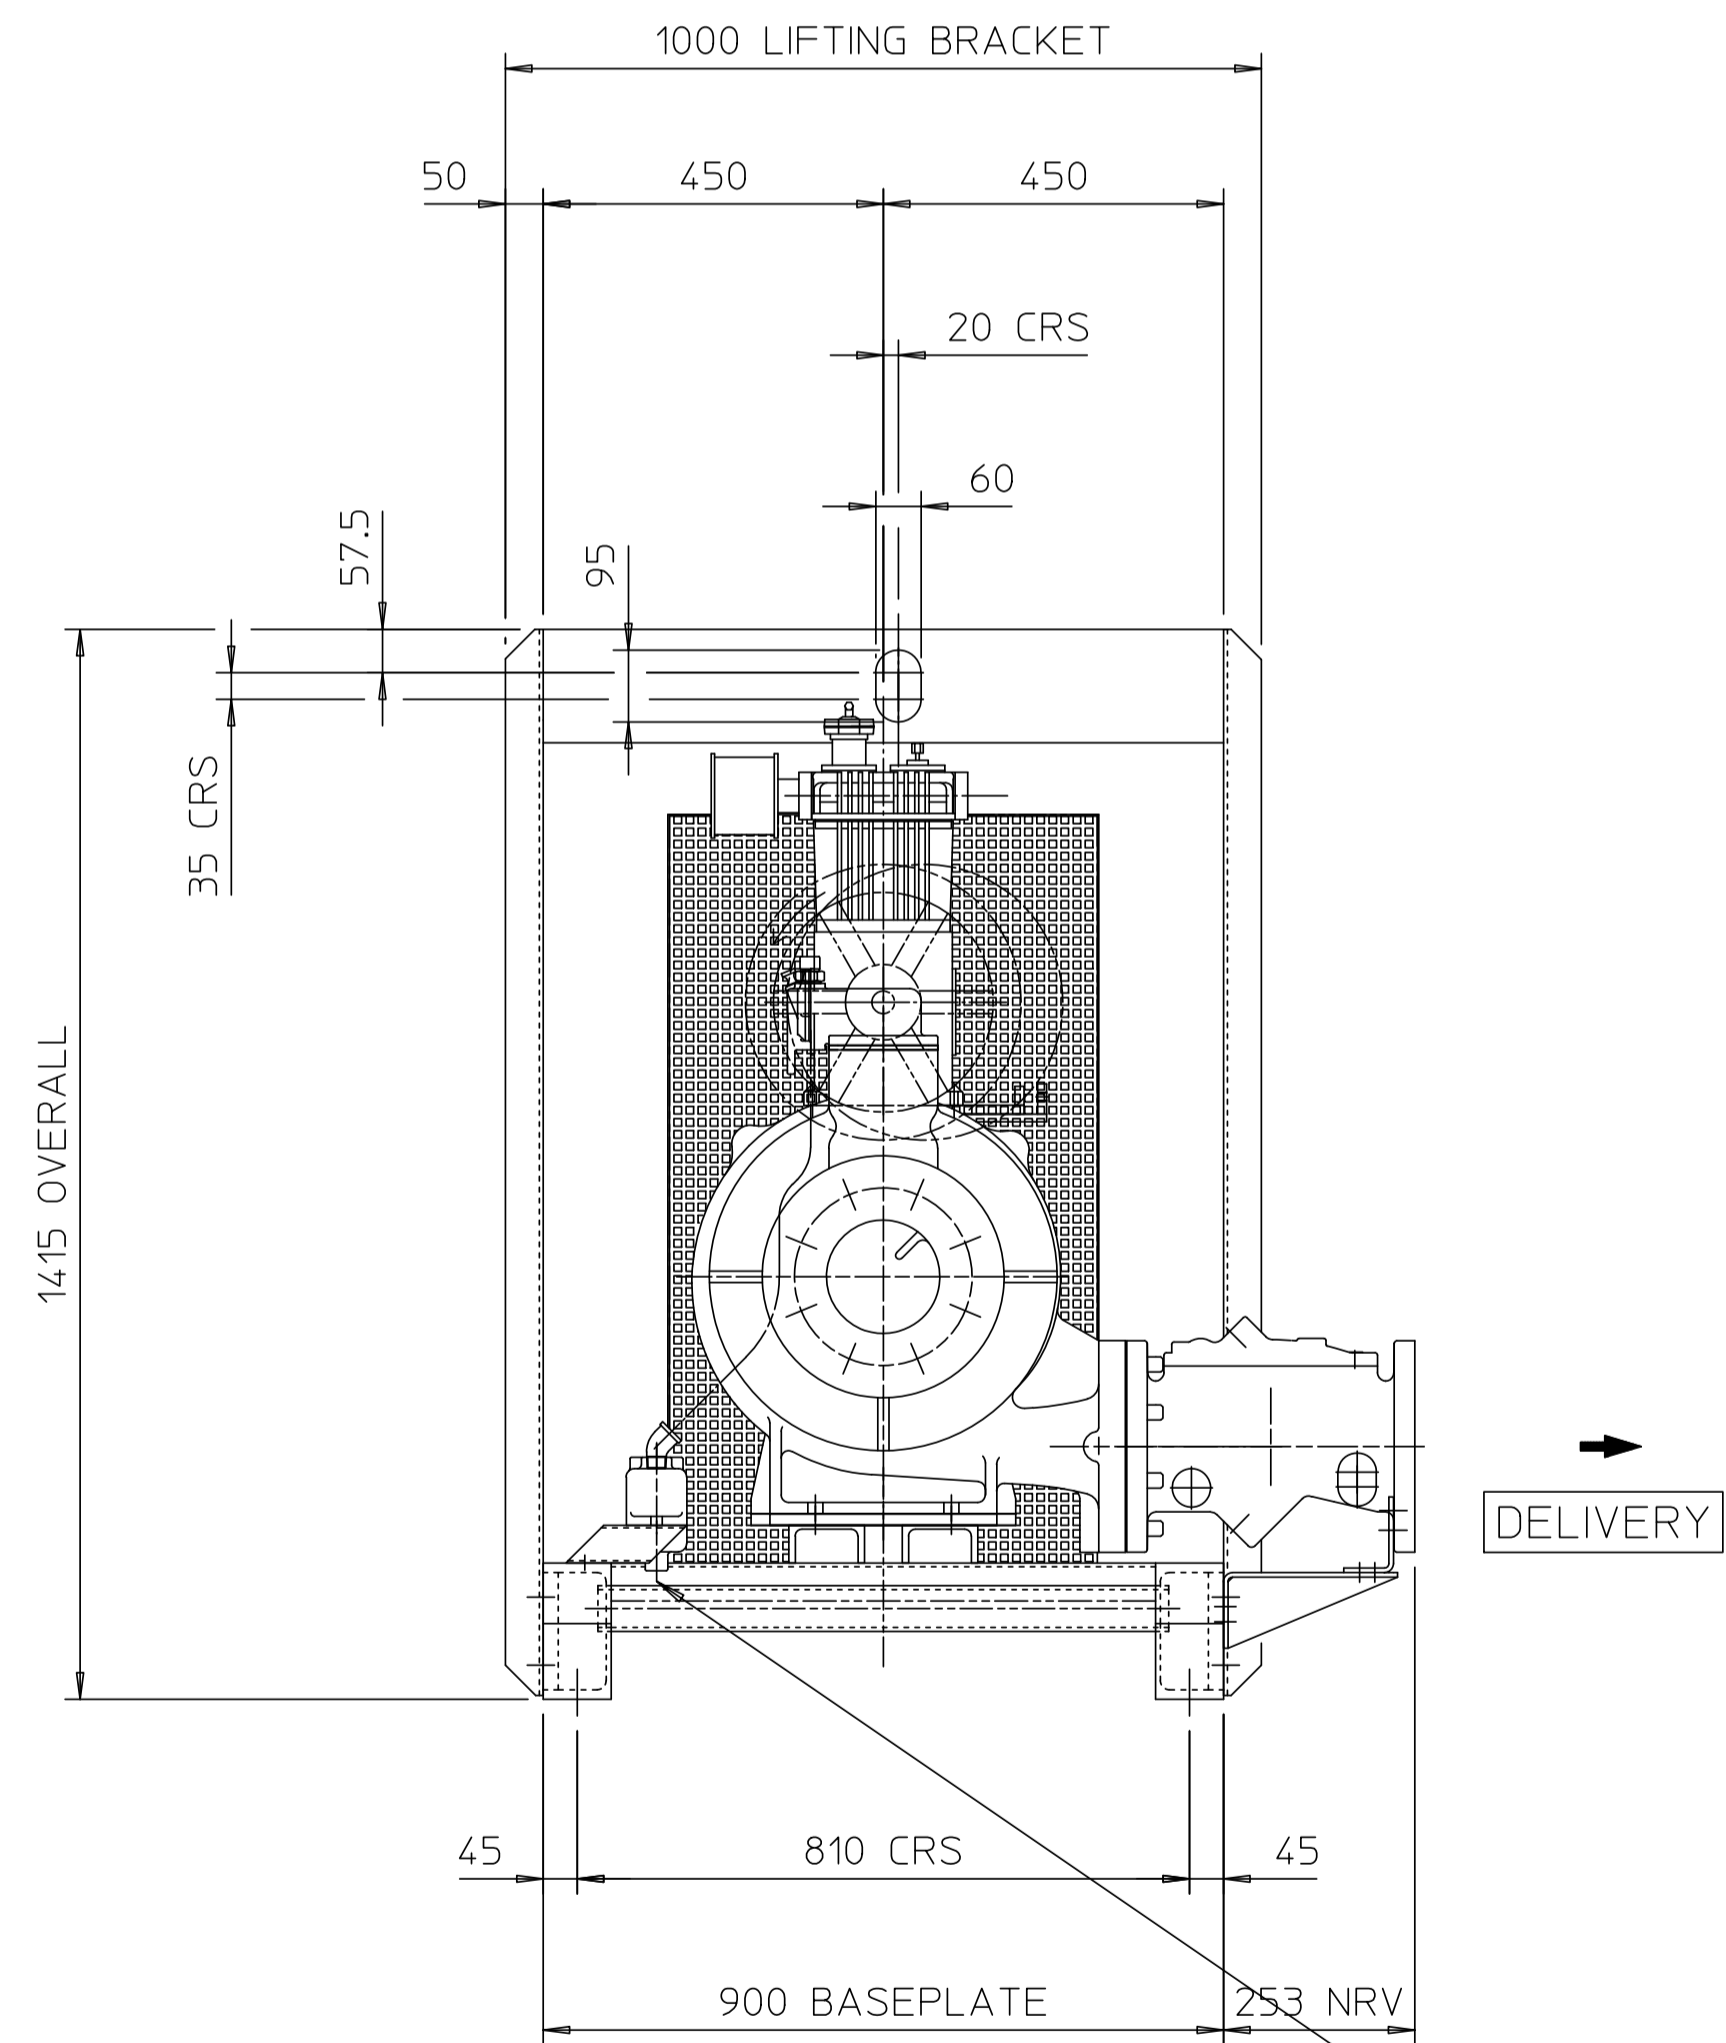

SUCTION FLANGED BS10 TABLE 'D'. / DELIVERY FLANGED BS4504 PN16.
 FLANGE FIXING DETAIL :

	Size	P.C.D.	Hole Dia.	No. Holes
SUCTION	6"	235mm	5/8" UNC	8
DELIVERY	150mm	240mm	22	8

1/2" BSP DRAIN - CUSTOMER TO PIPE

FORK POCKETS

1 COMPILED FOR S060793 - ACTUAL WEIGHT ADDED.		ECO No	S0 12/03/10	DRG. No.	HL150M-M3-BP-01	Shit 1 of 1
Iss. Description		Xylem Dewatering Solutions Quenington, Cirencester, Gloucestershire GL7 5BX, England. Tel: +44 (0)1285 750271 www.godwinpumps.co.uk		TITLE HL150M/160KW/GBX DRI-PRIME		
godwin a xylem brand		TOLERANCES + 3mm (unless otherwise stated)		IF IN DOUBT - ASK DO NOT SCALE Graphics: BS8888:2002 Dimensions: mm		
		We cannot guarantee dimensions of outside suppliers equipment		Third Angle Projection		
		© 2014		Drawn: AJJ Date: 29/03/10 Ch'k'd: AJJ Date: 18/02/14 Scale: 1:10		
				C.I.CONST.FLG 6 BS10 TD X 150 PN16		