

Concertor EA N150-5850

Мониторинг и контроль

Gateway

Да

Power Supply

24 V DC

Ports

1 x USB

1 x RS485

1 X Ethernet RJ 45

1 x Display interface, CAN

Communication

Modbus RTU

Modbus TCP

Standard I/O

4 x Digital outputs

4 x Digital inputs

1 x Analog input

1 x Analog output

Pump Interface

1 x Pump Communication Port

User Interface

14 x LED

1 x Rotator Switch

Data Logging

1000 data points

Environment Class

Protection class: IP 20

Operation temperature: -20°C to +65°C

Software Version

EA software – Possibility to change performance manually, status and alarms

Approvals

CE, UL, CSA

Interface (HMI)

None

Project	Project ID	Created by	Created on	Last update
			3/29/2019	

Concertor EA N150-5850


Кривая рабочей характеристики

Насос

Диаметр выхода 150 mm
 Диаметр всасывающего фланца 150 mm
 Impeller diameter 212 mm
 Количество лопастей 2

Motor

Двигатель N6020.181 18-08-1AZ-W 5.5KW
 Частота 50/60 Hz
 Ном/напряжение 380 V
 Фазы 3~
 Ном. мощность 5,5 kW
 Set power 5850 W
 Номинальный ток 9,85 A
 Пусковой ток 9,85 A
 Rated speed 500-1581 rpm

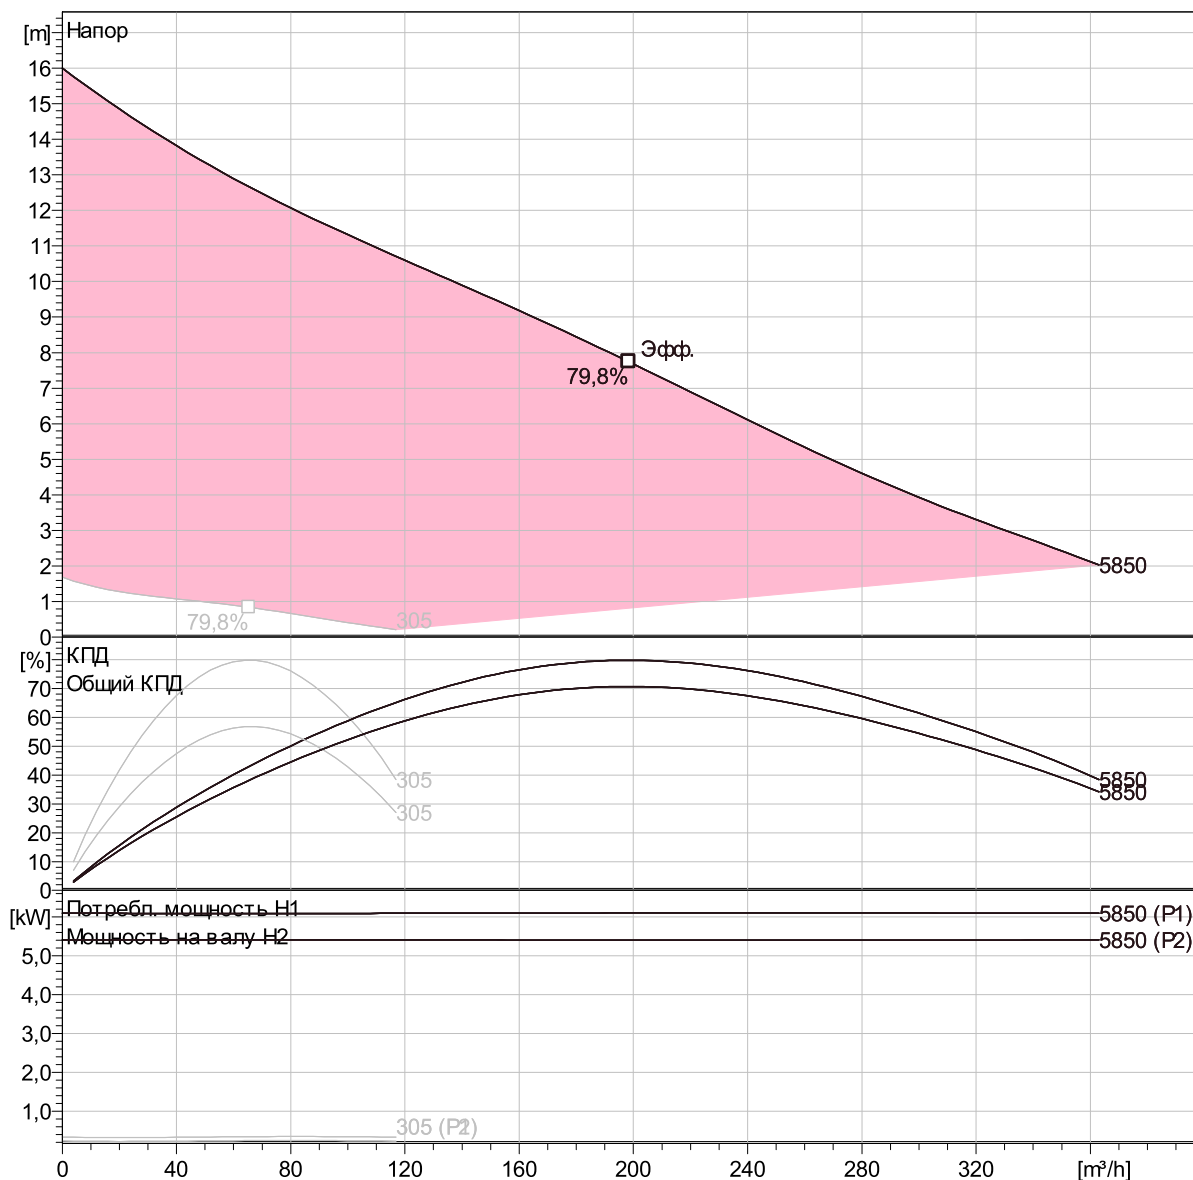


вода, чистая

Curve ISO


Project	Project ID	Created by	Created on 3/29/2019	Last update
---------	------------	------------	-------------------------	-------------

Concertor EA N150-5850 Duty Analysis

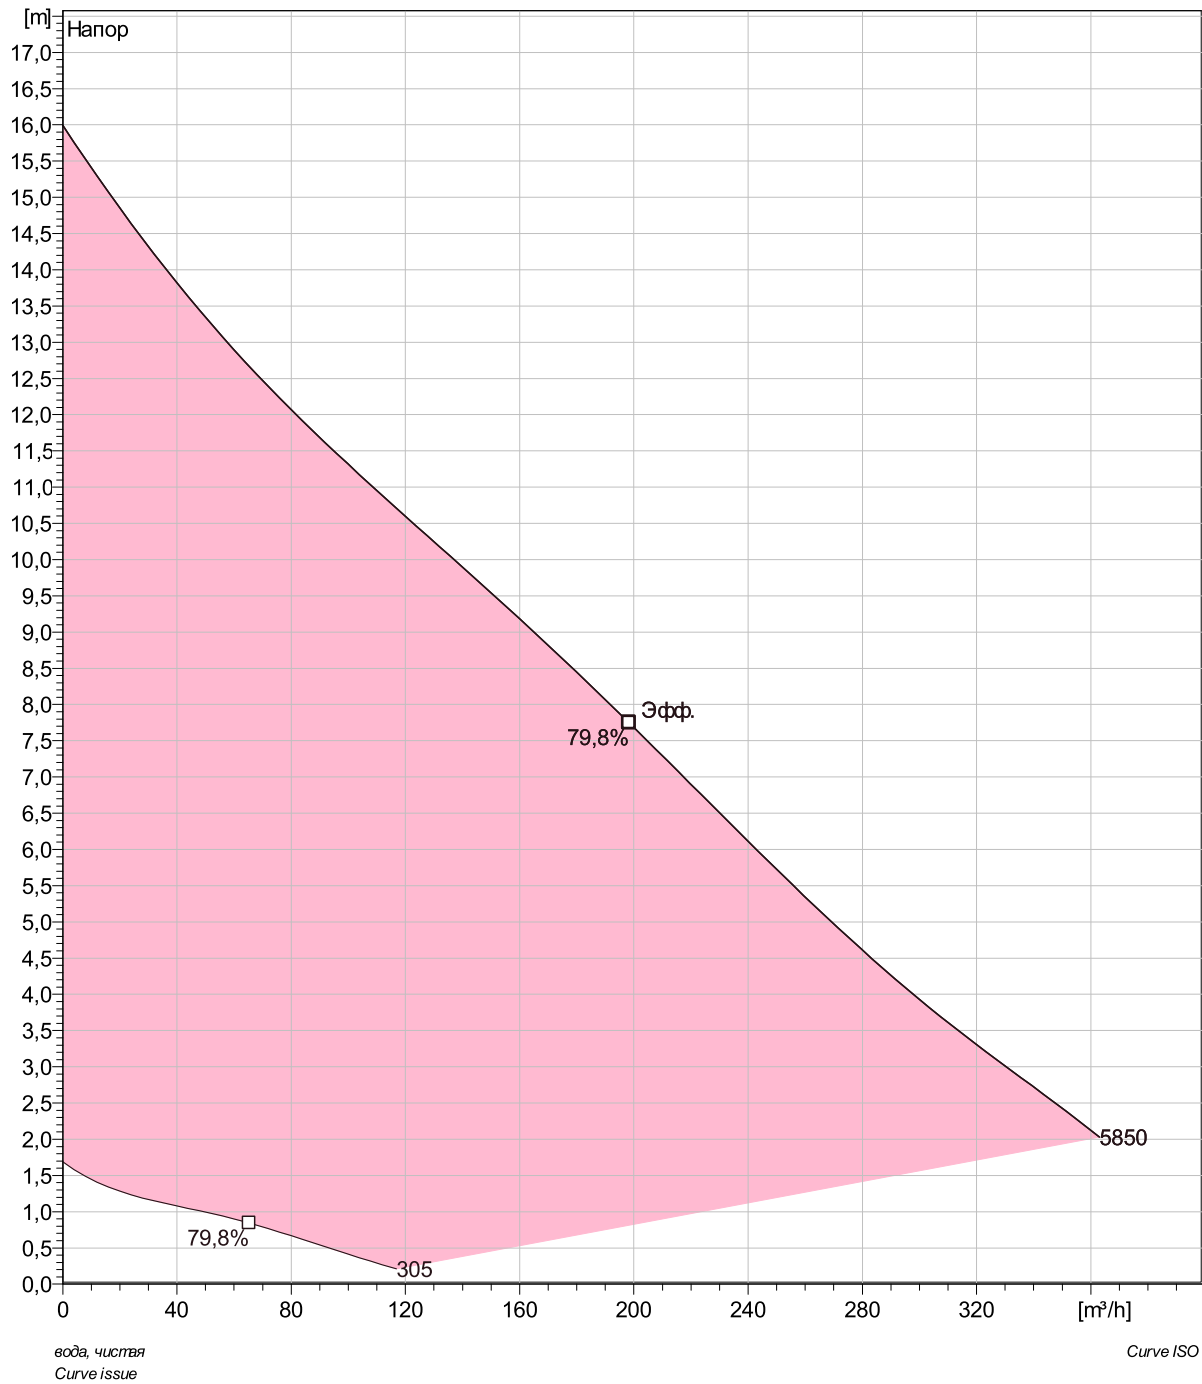

Project	Project ID	Created by	Created on	Last update
			3/29/2019	

Concertor EA N150-5850 Dimensional drawing

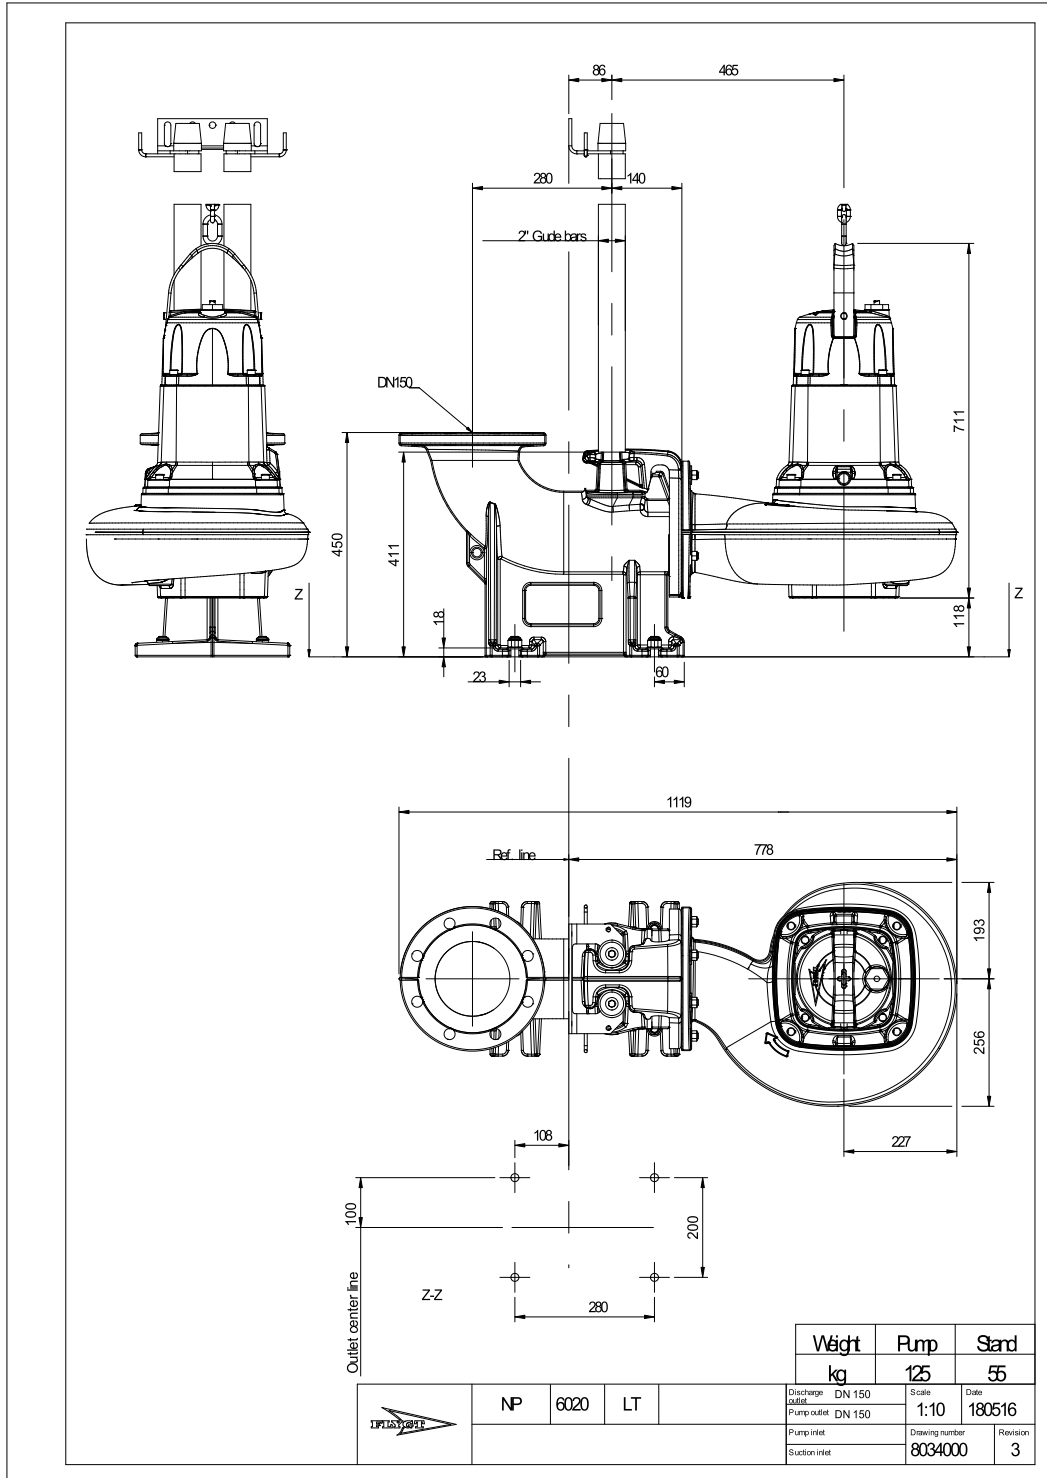

Project

Project ID

Created by

Created on
3/29/2019

Last update