



## FP 3171 SH 3~ 272

### Кривая рабочей характеристики


#### Насос

Диаметр выхода 100 mm  
 Диаметр всасывающего фланца 226 mm  
 Impeller diameter 226 mm  
 Количество лопастей 2


#### Motor

Двигатель F3171.350 25-18-2AA-W 22KW  
 Тип статора 2  
 Частота 50 Hz  
 Ном/напряжение 230 V  
 Число полюсов 2  
 Фазы 3~  
 Ном. мощность 22 kW  
 Номинальный ток 67 A  
 Пусковой ток 480 A  
 Ном. скорость вращения 2930 rpm


Коэффициент мощности  
 1/1 Load 0,91  
 3/4 Load 0,89  
 1/2 Load 0,82  
 Motor efficiency  
 1/1 Load 90,0 %  
 3/4 Load 91,5 %  
 1/2 Load 92,0 %

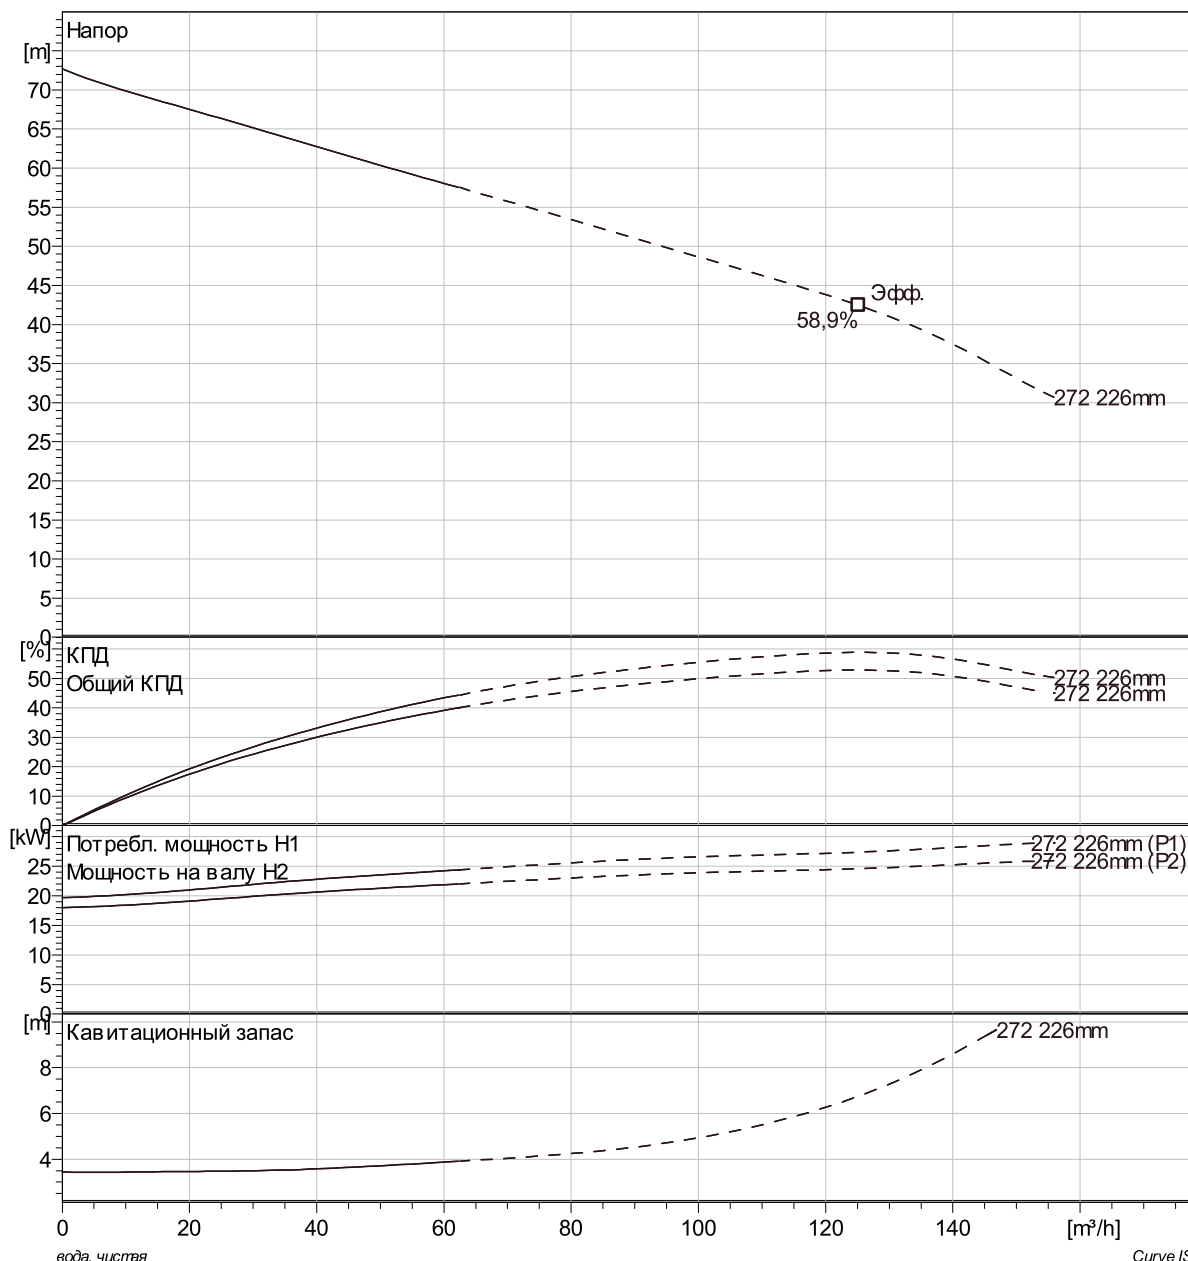

Project	Project ID	Created by	Created on 4/4/2019	Last update
---------	------------	------------	------------------------	-------------

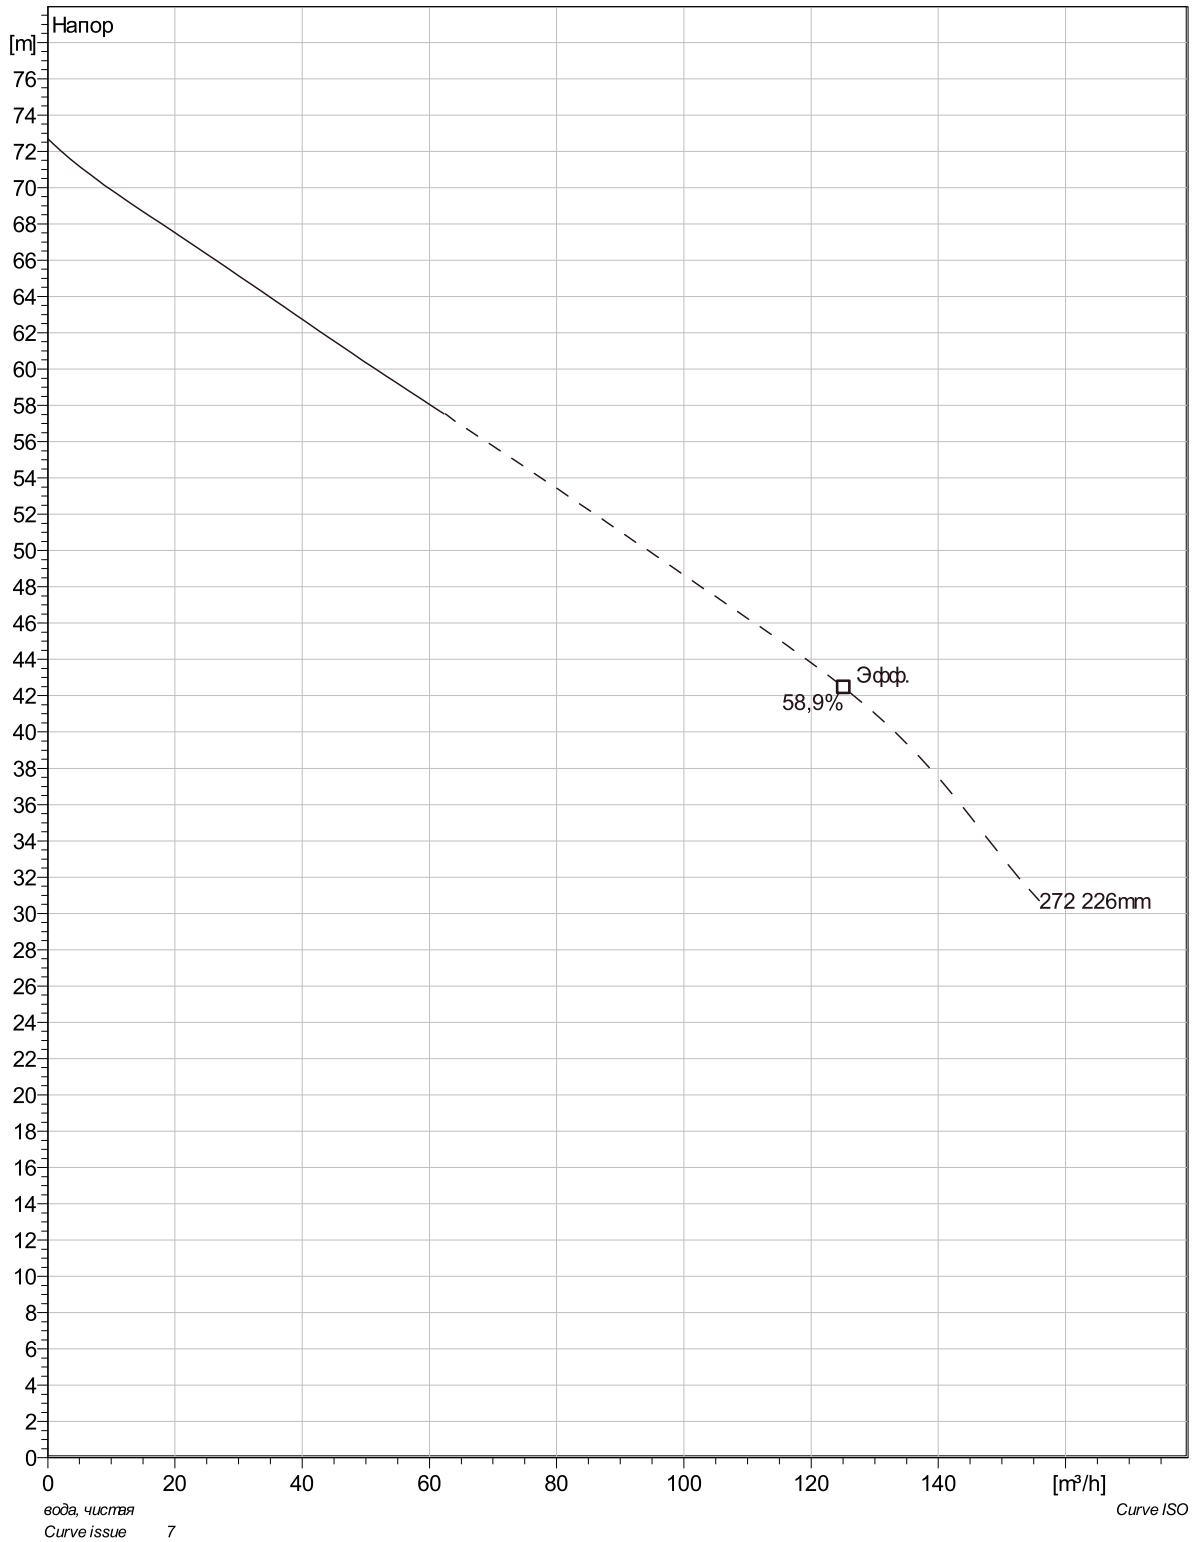


Project	Project ID	Created by	Created on	Last update
			4/4/2019	

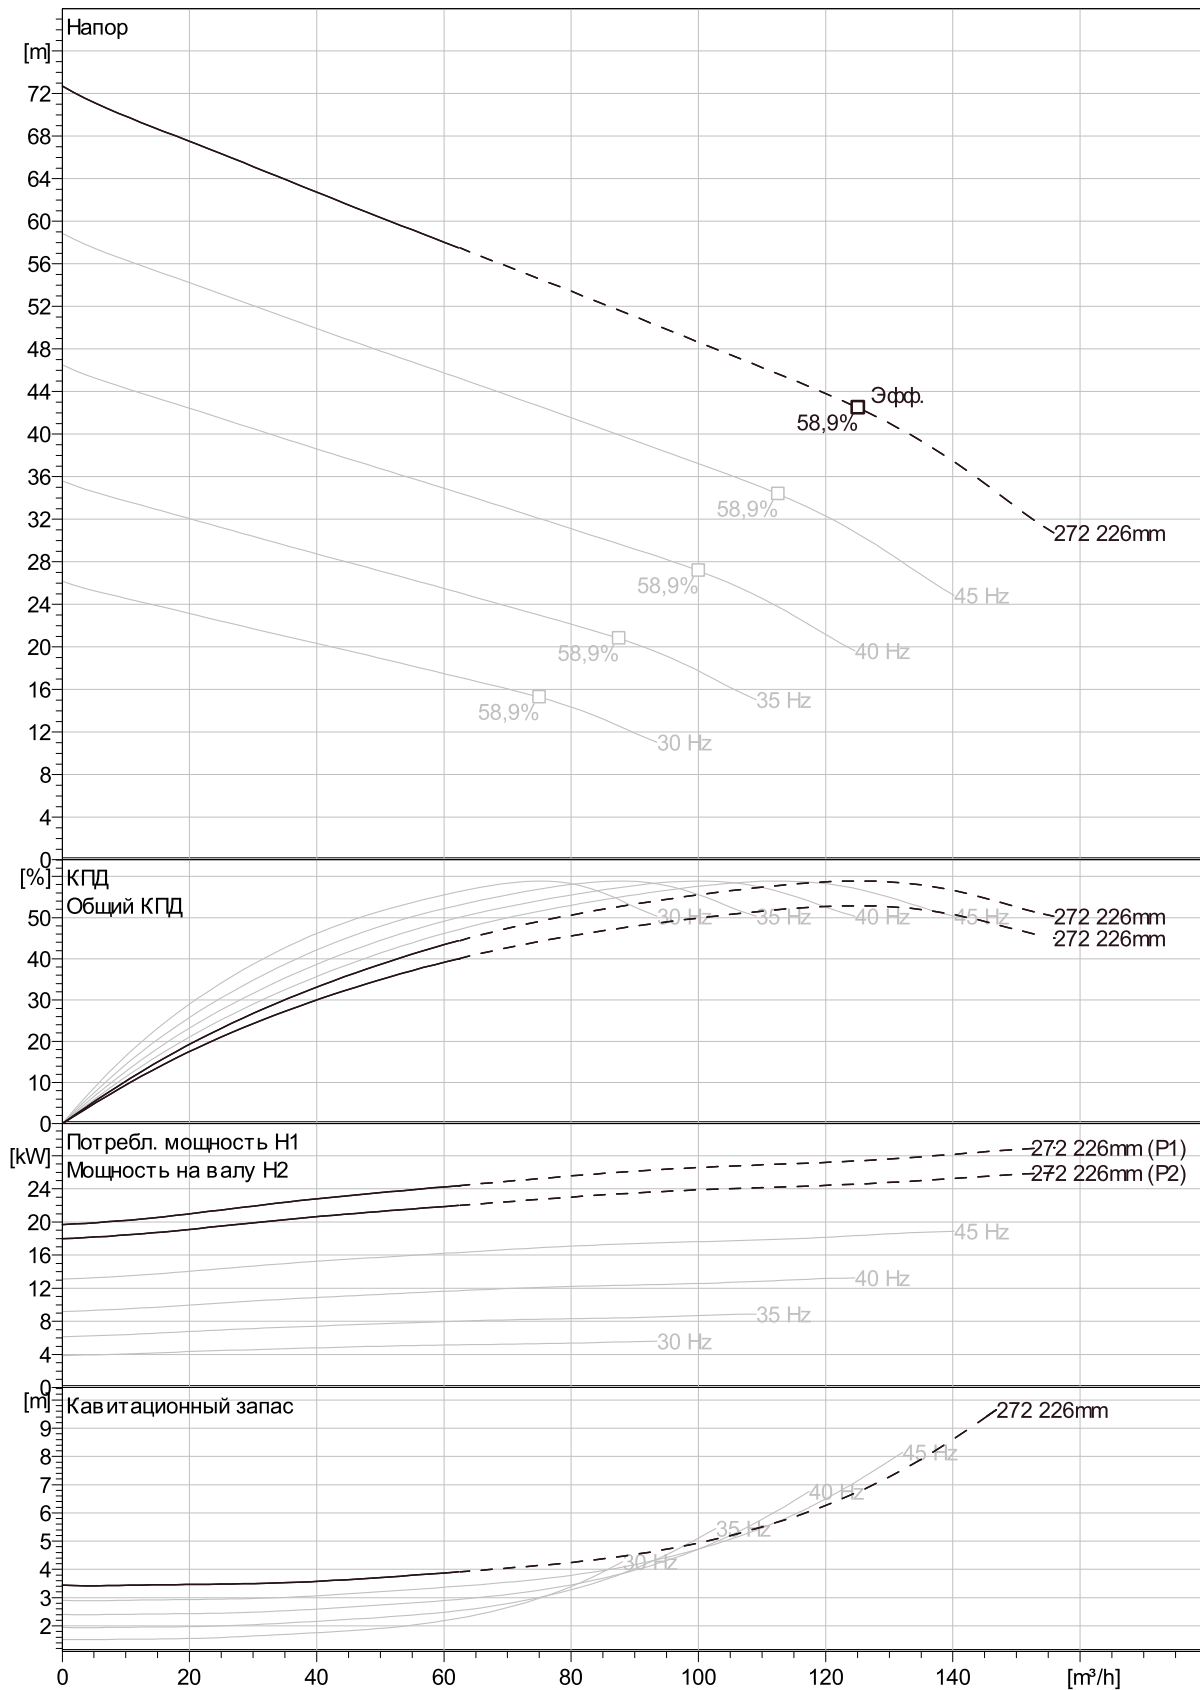


Curve ISO

Project	Project ID	Created by	Created on	Last update
			4/4/2019	

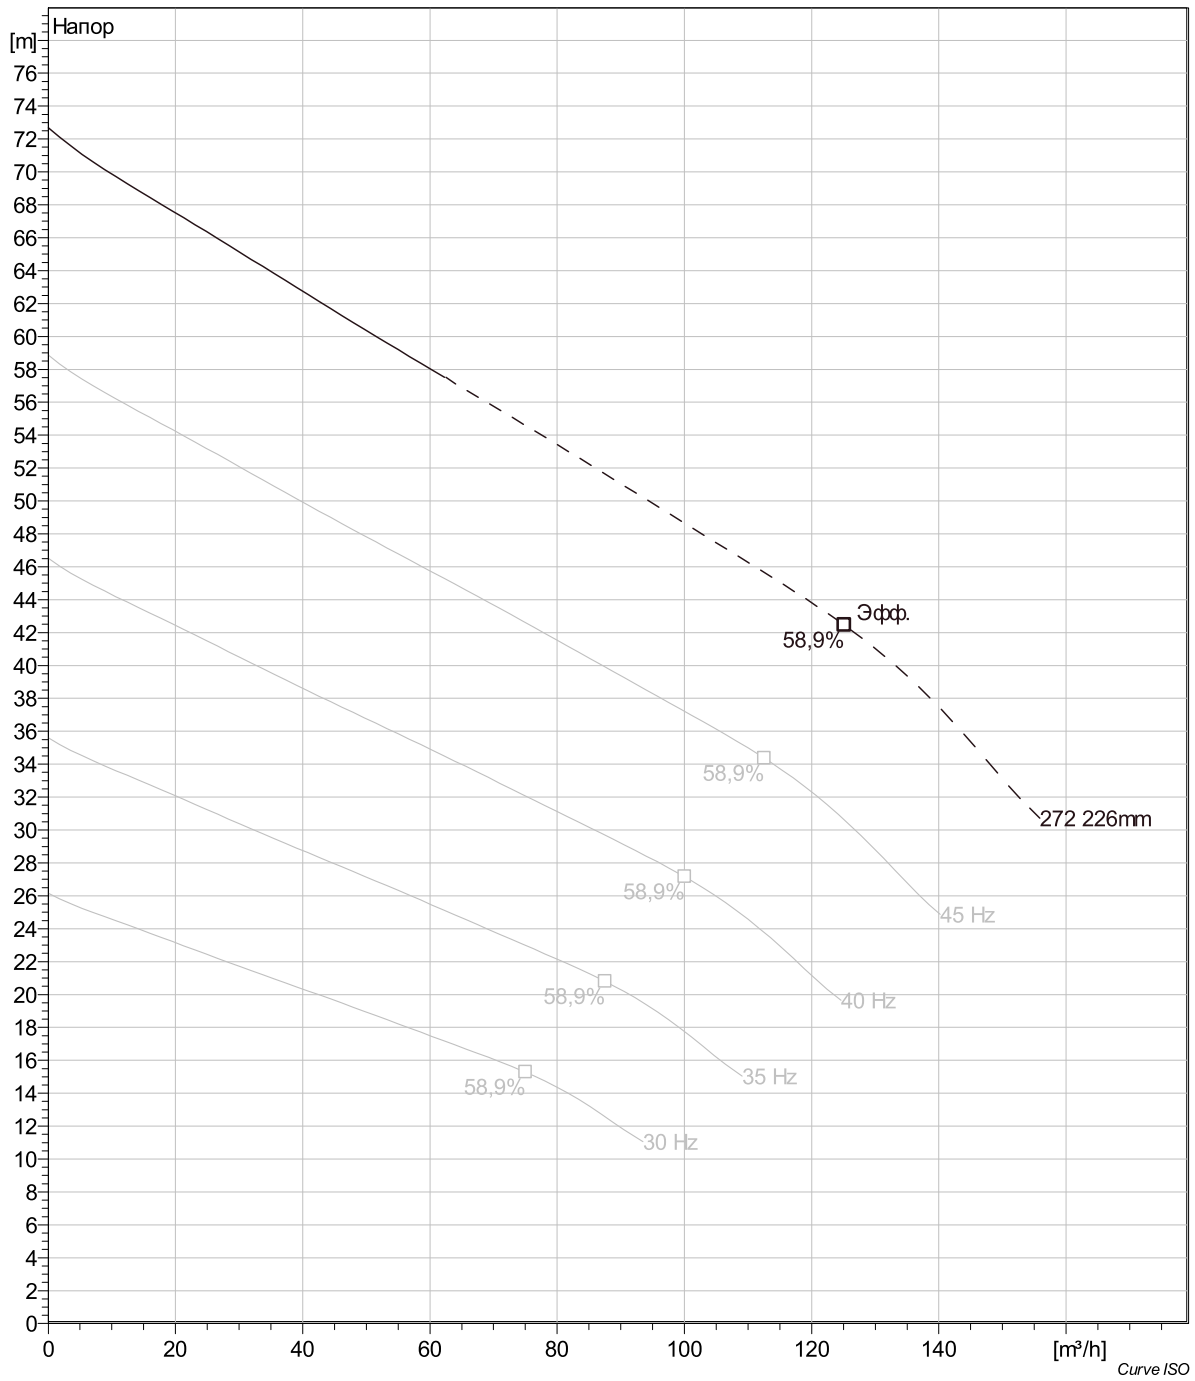

Project	Project ID	Created by	Created on	Last update
			4/4/2019	

## FP 3171 SH 3~ 272 Dimensional drawing

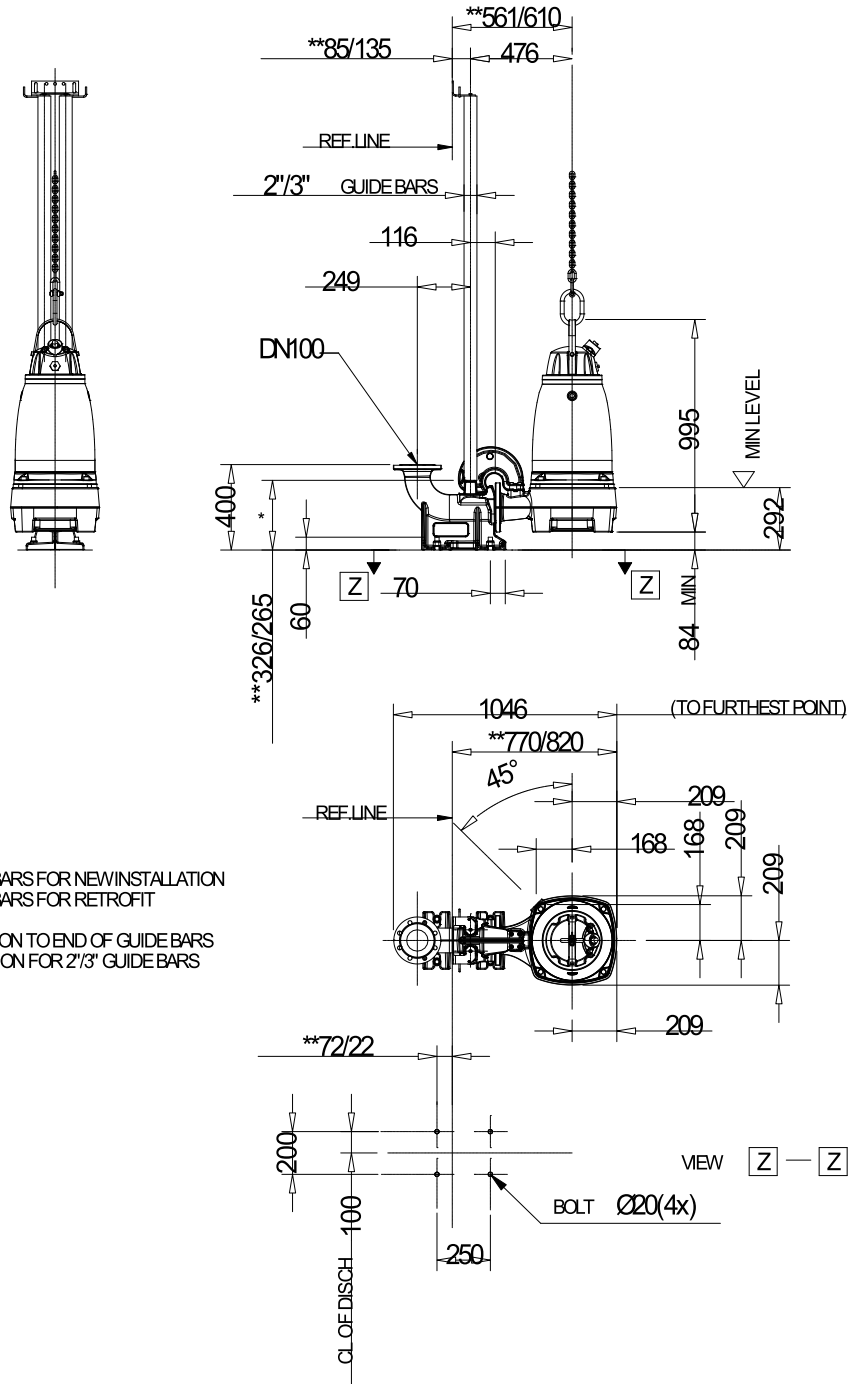

2" GUIDE BARS FOR NEW INSTALLATION  
3" GUIDE BARS FOR RETROFIT

\* DIMENSION TO END OF GUIDE BARS  
\*\* DIMENSION FOR 2 1/3" GUIDE BARS

NP,FP3171.091, 095, 181, 185, 350, 390 SH

Dimensional dwg

NPFP3171.091,095,181,185,350,390 SH

Project	Project ID	Created by	Created on	Last update
			4/4/2019	